

NPFSR-K122YMD

Input: E-STOP, Safety gate


Output: 2NO, non-delay + 2NO, d-delay

The inputs of K series E-STOP, safety gate input safety relays are normally closed contact signals, which are used for emergency braking or the protection of people entering dangerous areas, and widely used in machining and other industries.

- 1oo2 architecture
- With detection of shorts across contacts
- With monitored manual reset function
- The safety function remains effective in the case of a component failure
- The correct opening and closing of the safety function relays is tested automatically in each on-off cycle

Voltage range	24V DC
Voltage tolerance	0.85 ~ 1.1
Power dissipation	≤ 3.8W/24V DC
Current consumption	≤ 50mA/24V DC
Cable resistance	≤ 15Ω
Input devices	E-STOP button, Safety gate
Signal type	2 NO, non-delay + 2 NO, d-delay
Contact type	Forced guided
Contact material	AgSnO ₂
Contact loading	AC-15: 3A/230V, DC-13: 3A/24V
Contact fuse protection	10A gL/gG(NO)
Delay time T _{set}	0.1~80s, default 10s
Delay time accuracy	±15%
Switch-on	≤ 150ms
Release	E-stop: ≤ 30ms; Power failure: ≤ 100ms
Recovery time	E-stop: ≤ 30ms, Power failure: ≤ 100ms
Supply short interruption	20ms
EMC	According to IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
Rated insulation voltage	250V AC
Rated impulse voltage	6000V(1.2/50us)
Dielectric strength	1500V AC, 1 min
Clearance and creepage	According to IEC 60947-1
Vibration	10Hz ~ 55Hz, 0.35mm
Overvoltage category	III
Pollution degree	2
Protection type	IP20
Ambient temperature	-20°C ~ +60°C
Storage temperature	-40°C ~ +80°C
Operating altitude	≤2000m
Mechanical life	10×10

Functional Block Diagram

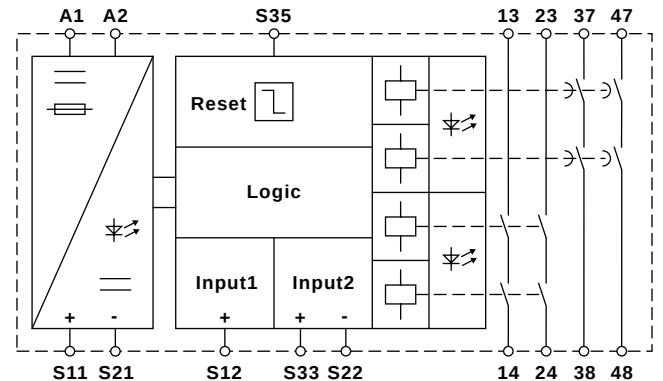

2.74921 9912 -2rancPower diss0 0 1 kcovery time 252.743334.482 3340.94ce

Ove85 p CT(Operati Tft009rancToltage(d allLe,0 -40C)TJTf-SO1 T849elay.741 -243.779 2450 re311 3ang2725).1-81T(2) 252.74348 r7, 4b441e)