


NPFSR-K122AMD

3X ÓY Y G3 SQSG 3xW
X 2NO+2NC

K


1002

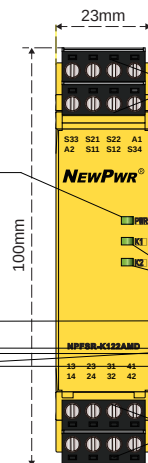

H v Q

h 3 y	24V AC/DC
3 y k T	0.85 ~ 1.1
f L	50Hz ~ 60Hz
Q i ă	2.2W/24V DC, 5.4VA/24V AC
3 3 L	50mA/24V DC
M 1 3	
3 t	PNP
e Q	2NO+2NC
e 1 3	
e q	AgSnO ₂
e k	AC-15: 5A/230V, DC-13: 5A/24V
e R w 3 i	10A gL/gG(NO), 6A gL/gG(NC)
T H	
Q H	
Q u H	
3 0 ~ H A Ā	
3 J k	IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
h N 1 3 y	250V AC
h ' ă P 3 y	
N 1 Ā ŷ	1500V AC, 1 min
3 ↔ = k 3 "	IEC 60947-1
U	10Hz ~ 55Hz, 0.35mm
y 4 1	III
/ ... 4 1	2
i 4 1	IP20
† Ā □ ŷ	-20°C ~ +60°C
Ü è □ ŷ	-40°C ~ +80°C
≡ ð ŷ	
4 m u	10×10 ⁶

I ↑ g

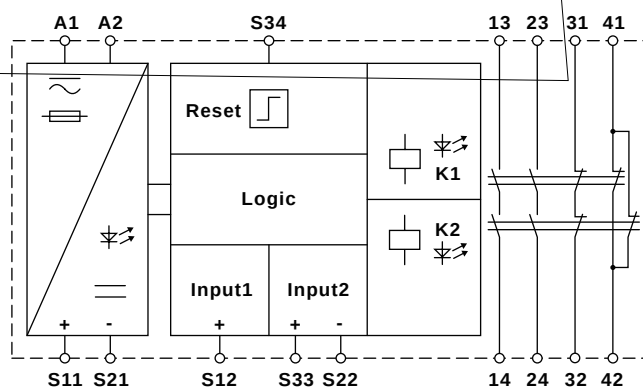

G 3 v Q

ó i 4 1	PLe, ISO 13849
G 3 1,	Cat.4, ISO 13849
y n H	20, ISO 13849
W z Ā ~ '	99%, ISO 13849
W z u , Q H	164, ISO 13849
H t , Q	68, ISO 13849
G 3 H Q ó 4 1	SIL3, IEC 61508
φ " G 3 H Q ó 4 1	SIL CL3, IEC 62061
. T Q ŷ	1, IEC 62061
G 3, Q' Q	, IEC 62061
ð H u , Q H '	1.29×10 ⁻⁵ /PTI=20 IEC 62061
½ ñ H u , Q H '	1.49×10 ⁻¹⁰ 1/h, IEC 62061
y B 1,	0, IEC 60204