

→ 简介

K

■ 1002

■

■

■

■

-

→ 技术参数

24V AC/DC

0.85~1.1

50Hz~60Hz

≤2.2 W/24V DC    ≤5.4 VA/24V AC

≤50mA/24V DC

≤15Ω

2~20kΩ

3NO+1NC    2NO+2NC

AgSnO<sub>2</sub>+0.2μmAu

AC-15    5A/230V    DC-13    5A/24V

10A gL/gG(NO)    6A gL/gG(NC)

数

≤100ms

≤30ms                      ≤100ms

≤30ms                      ≤100ms

20ms

境    数

IEC/EN 60947    IEC 61326-3-1


IEC/EN 61000-6-2    IEC/EN 61000-6-4

250V AC

6000V (1.2/50μs)

：http://www.anpe.cn

：025-84459479



- 1002
- 
- 
- 
- 
- 

→ 技术参数

24V AC/DC  
0.85~1.1  
50Hz~60Hz  
≤2.2 W/24V DC    ≤5.4 VA/24V AC

≤50mA/24V DC  
≤15Ω

2~20kΩ

3NO+1NC    2NO+2NC

AgSnO<sub>2</sub>+0.2μmAu

AC-15    5A/230V    DC-13    5A/24V  
10A gL/gG(NO)    6A gL/gG(NC)

数

≤100ms

≤30ms                      ≤100ms

≤30ms                      ≤100ms  
20ms

境    数


IEC/EN 60947    IEC 61326-3-1

IEC/EN 61000-6-2    IEC/EN 61000-6-4

250V AC

6000V (1.2/50μs)

| 产品型号           | 输入设备 | 复位方式 | 触点数量    |
|----------------|------|------|---------|
| NPFSR-K4F31AMD |      | /    | 3NO+1NC |
| NPFSR-K4F31MD  |      |      | 3NO+1NC |
| NPFSR-K4F22AMD |      | /    | 2NO+2NC |
| NPFSR-K4F22MD  |      |      | 2NO+2NC |
| NPFSR-K4C31AD  |      | / /  | 3NO+1NC |
| NPFSR-K4C22AD  |      | / /  | 2NO+2NC |

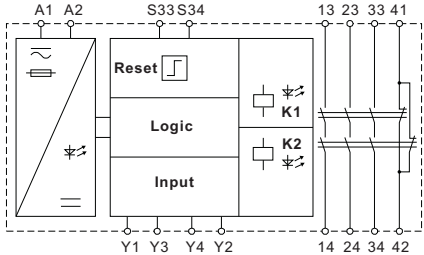

NPFSR-K4F31AMD

警告！

(                      )

1    / 3

NPFSR-K4F22AMD



警告!

