

NPEXA-C11H NPEXA-C111H

3 4 ~ 20 mA




PC

'H

ě 3 3 18V DC ~ 60V DC
 † Ā i ě 0.8W (24V)
 1.2W (24V)
 3 3 N X
 , 3 N X / 4 ~ 20mA
 ě X R_L 550q
 R_L < [(U-3)/0.02]q; U
 ý 1 ý X 1°C (-20°C ~ +60°C)
 □ ý 30ppm/°C
 φ Z 'H X 500ms
 3 J k X IEC 61326-3-1
 k 3 Ā ý X 3000V AC (/)
 1500V AC (/)
 M 3 X 100Mq (/ /)
 † Ā □ ý X -20°C ~ +60°C
 ě ě □ ý X -40°C ~ +80°C
 † ě 1 X 17.8mm× 110mm× 117mm
 , † ě X 4mA~20mA NE43

Z 1 2 A B
 C T4 ~ T6

ì 1 g,

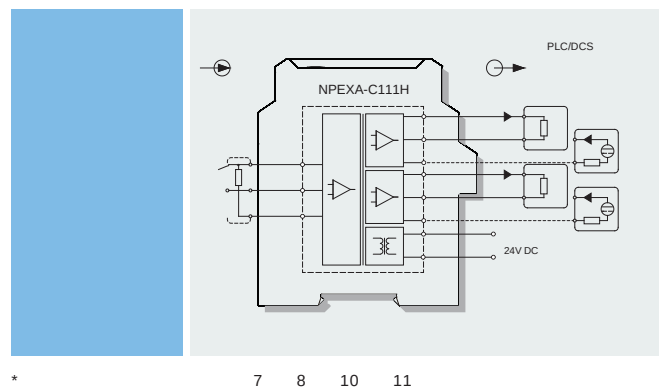

v "Q

(CQST)

[Ex ia Ga] C
 (U_m) 250V
 (1 2)
 U₀=8.7V, I₀=33mA, P₀=72mW
 C₀=3.58εF, L₀=21mH

3 N u e

NPEXA-C1 H

PB

1

1

1

1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA